

QMPS360

360°/GHz

Features:
 * Low Insertion Loss
 * High Power
 * High Reliable

Applications:
 * Laboratory Test
 * Transmitter
 * Instrumentation
 * Wireless

Electrical


Frequency: DC~2GHz
 Impedance: 50Ω
 Average Power: 100W
 Peak Power*1: 5KW

[1] Pulse width: 5us, duty cycle: 2%.


Frequency (GHz)	VSWR (max.)	Insertion Loss (dB, max.)	Phase Adjustment*2 (°)
DC~1	1.4	1.5	0~360
DC~2	1.5	2	0~720

[2] Phase shift varies linearly corresponding to the frequency. For example, if the maximum phase shift is 720°@2GHz, the maximum phase shift is 360°@1GHz.

Outline Drawings

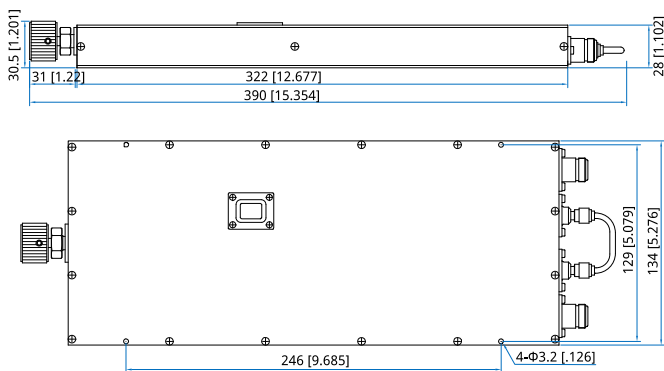

Analog

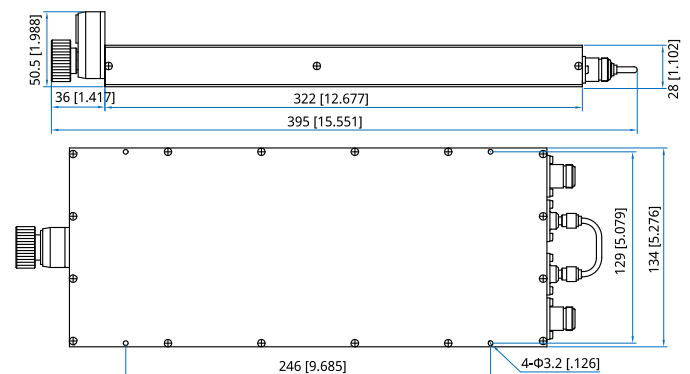

Digital

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*3: 390*134*30.5mm
 15.354*5.276*1.201in
 Size*4: 395*134*50.5mm
 15.351*5.276*1.988in

Weight: 1800g

RF Connectors: N Female, SMA Female

Outer Conductor: Nickel Plated Brass

Inner Conductor: Gold Plated Beryllium Bronze

Housing Material: Aluminum

[3] Analog.

[4] Digital.

Environmental

Operating Temperature: -10~+50°C

Non-operating Temperature: -40~+70°C

How To Order**QMPS360-X-Y-Z**

X: Frequency in GHz

Y: Connector type

Z: Display

Examples:

To order a digital phase shifter, DC-1GHz, N female to N female, specify QMPS360-1-N-D.

Connector naming rules:

S - SMA

N - N

Display naming rules:

A - Analog

D - Digital