

QAKK 2.92mm to 2.92mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency:	DC~40GHz
VSWR:	1.15 max. 1.25 max. for right angle
Impedance:	50Ω

Mechanical

RF Connectors:	2.92mm
Mating Life Cycle:	500 cycles
Outer Conductor:	SUS303 Stainless Steel
Dielectric:	PEI
Inner Conductor:	Gold Plated Beryllium Copper

Environmental


Temperature:	-60~+165°C
--------------	------------

How To Order

- QAKK-FF** - 2.92mm (f) to 2.92mm (f), Outline A
- QAKK-MM** - 2.92mm (m) to 2.92mm (m), Outline B
- QAKK-MF** - 2.92mm (m) to 2.92mm (f), Outline C
- QAKKR-FF** - 2.92mm (f) to 2.92mm (f) right angle, Outline D
- QAKKR-MM** - 2.92mm (m) to 2.92mm (m) right angle, Outline E
- QAKKR-MF** - 2.92mm (m) to 2.92mm (f) right angle, Outline F
- QAKKH-FF** - 2.92mm (f) to 2.92mm (f) bulk head, Outline G
- QAKKH-MF** - 2.92mm (m) to 2.92mm (f) bulk head, Outline H
- QAKKL-FF** - 2.92mm (f) to 2.92mm (f) flange mount, Outline I

Customization is available upon request.

Outline Drawings

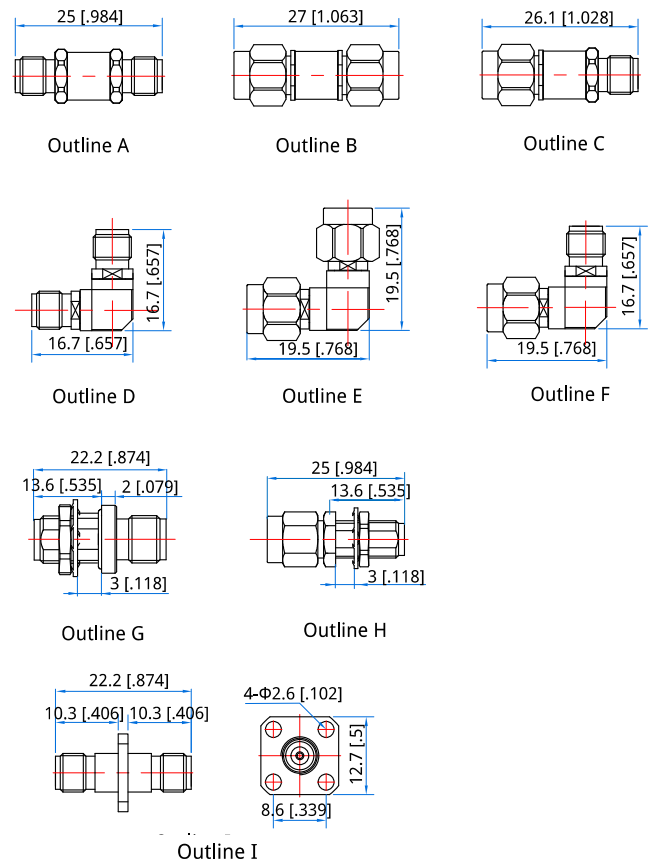

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]