

QFA6701

DC~67GHz, 1W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

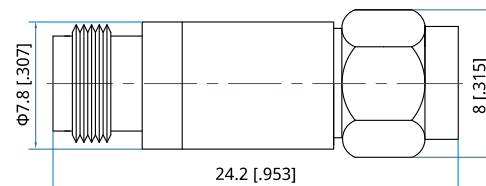
Frequency:	DC~67GHz
Attenuation:	6, 10dB
Attenuation Accuracy:	±2dB
Impedance:	50Ω
VSWR:	2 max.
Average Power:	1W

Mechanical

Length:	24.2mm 0.953in
RF Connectors:	1.85mm

Environmental

Operating Temperature:	0~+50°C
Non-operating Temperature:	-20~+70°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
QFA6701-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

V - 1.85mm

Examples:

To order an attenuator, DC-67GHz, 1.85mm, 6dB attenuation, specify QFA6701-67-6-V.