QDB-10-18000

10MHz~18GHz

Features:
* Broadband
* High Sensitivity

Applications:
* Telecom
* Instrumentation
* Laboratory Test
* Radar

Electrical

Frequency Range:	0.01~18GHz
Insertion Loss:	0.6dB max.
VSWR:	1.25 max.
Impedance:	50Ω
Voltage:	50V max.

Mechanical

Connectors:	N
Mating Life Cycle:	500 cycles
Outer Conductors:	Passivated SUS303 Stainless Steel
Dielectric:	PEI
Inner Conductors:	Gold Plated Beryllium Copper

Environmental

Operating Temperature:	-55~+165℃

Outline Drawings

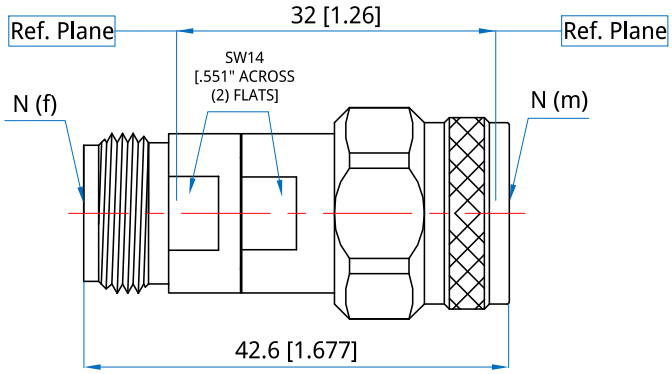

Outline A

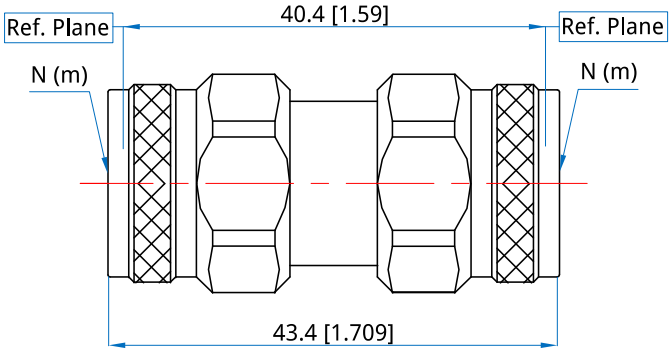

Outline B

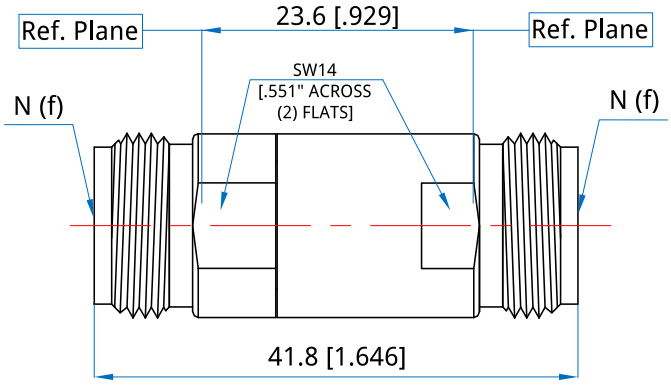

Outline C

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QDB-10-18000-NNF - Outline A
QDB-10-18000-NN - Outline B
QDB-10-18000-NFNF - Outline C

Customization is available upon request.