

QRHA28

26.5~40GHz, WR-28

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 26.5~40GHz
Gain: 10, 15, 20, 25dB
VSWR: 1.25 max.
1.5 max. (Connectorized)
Impedance: 50Ω

Mechanical

Interface: WR-28
Flange: UG599/U
Connectors: 2.92mm Female
Material: Brass

How To Order

QRHA28-X-Y

X: Gain in dB

Y: Connector type

Connector naming rules:


K - 2.92mm Female

Examples:


To order an Antenna, 26.5-40GHz, 10dB, WR-28, specify QRHA28-10.

Customization is available upon request.

Outline Drawings

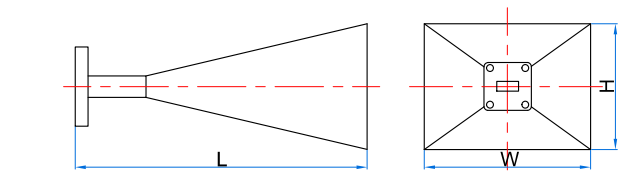

Outline A

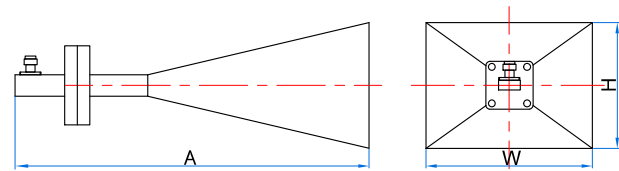

Outline B

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Gain	L	W	H	A
10dB	22.4 [.882]	12.1 [.476]	9.4 [.37]	52.4 [2.063]
15dB	27 [1.063]	23.4 [.921]	18.1 [.713]	57 [2.244]
20dB	65 [2.5591]	44 [1.732]	35.1 [1.382]	95 [3.74]
25dB	179.7 [7.075]	77.4 [3.047]	62.6 [2.465]	209.7 [8.256]