
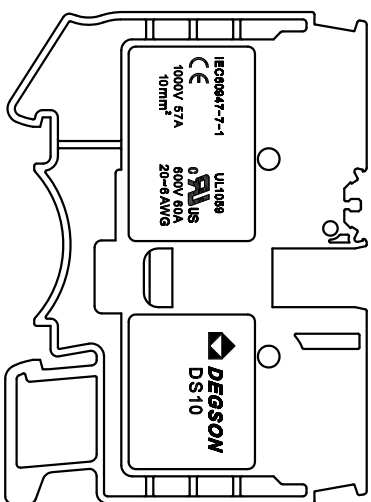
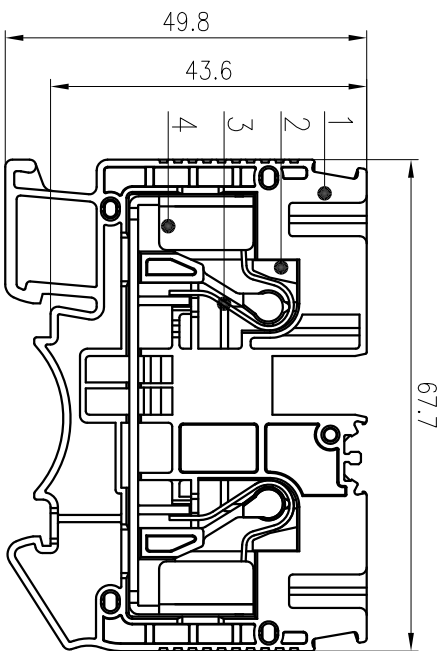


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	±2
备注公差/General tolerances(mm)												$\frac{\text{D}}{\text{Z}}$	



UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/60	600/60	600/75
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	1000/57	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible) (mm ² /AWG)	0.5~10.16(Sol)/20~6		
间距/Pitch(mm)	10.2		
铜线长度/Striping length(mm)	16-18		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL 2020.06.01	NAME:	
CHKD:	Mao J 2020.06.01	DRAWING NO.:	
DRAFT:	Ding F 2016.04.14	TYPE: CUSTOMER DRAWING	

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD
 DS10-01P-1Y-00A(H)

4	Current Carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94 V-0
1	Housing	PA66	UL94 V-0

ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRAFT	DATE
------	--------------	----------	-------	-----	-----	-------------	-------	------

SIZE: A4	mm	inch	SCALE: 1:1	REV	DO-4
				SHEET	1/1