




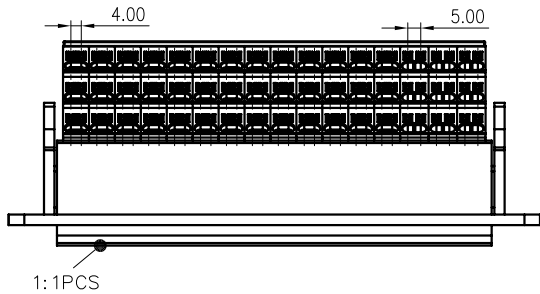

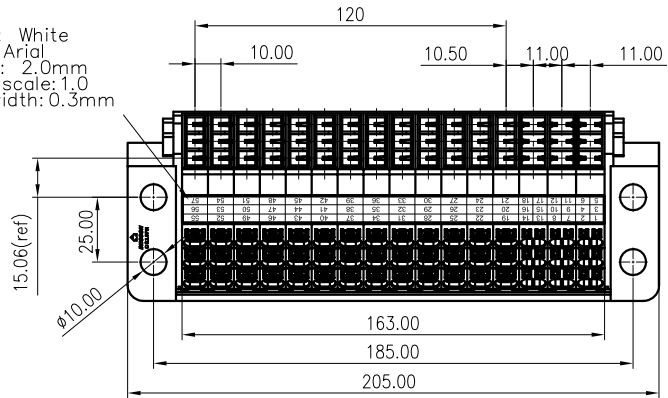
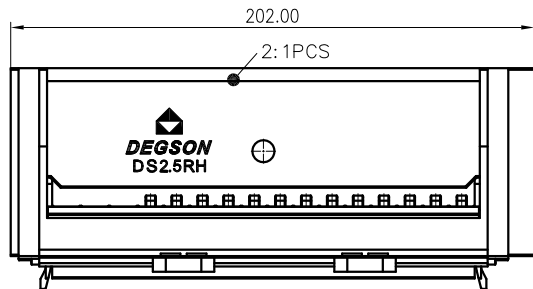


- 1. Color : White
- 2. Font: Arial
- 3. Height: 2.0mm
- 4. Width scale: 1.0
- 5. Line width: 0.3mm

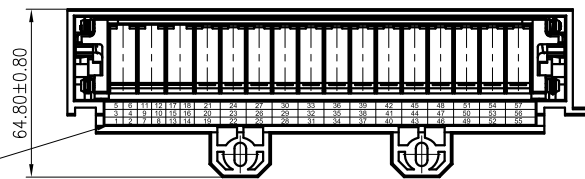

未注公差/General	tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	D
~	~	~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	250	315	400	500	±2	
	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

- 1. Color : White
- 2. Font: Arial
- 3. Height: 2.0mm
- 4. Width scale: 1.0
- 5. Line width: 0.3mm



ITEM	NAME OF PART	MATERIAL	NOTES
5	Clamp	Copper alloy	Sn Plated
4	Housing 2	PA66	UL94-V0
3	Housing 1	PA66	UL94-V0
2	Subject 2		
1	Subject 1		

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/13	/	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/20	320/20	630/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/24~16,14(Sol)		
剥线长度/Stripping length(mm)	14		
使用温度范围/Operating temperature(°C)	-40~+80		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: RAL	7043		

MATERIAL: /	SURFACE: /		
MAT NO.:	宁波高松电子有限公司		
STATUS: /	NINGBO DEGSON ELECTRICAL CO., LTD		
APPD: LanChH 2021.05.10	NAME: DS2.5PH-16P-1Y-00/XXA(H)		
CHKD: /	DRAWING NO.: 10001532		
DRFT: GongYZh 2020.03.17	REV	TO	
SIZE: A3	TYPE: CUSTOMER DRAWING		SCALE: 1:2
REV	ECN	DESCRIPTION	DRFT DATE
④	mm	mm	inch
			SHEET 1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model, or designs registrations. 除非给予明确授权，否则禁止转让、复制或、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。