



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

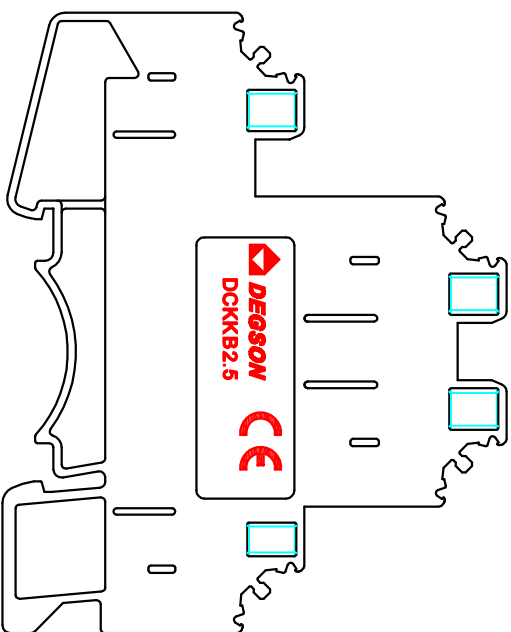

DCKKB2.5 - 01P - 1Y - 02A (H)
 (Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
 (RoHS)
 02A-(Customer request)

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

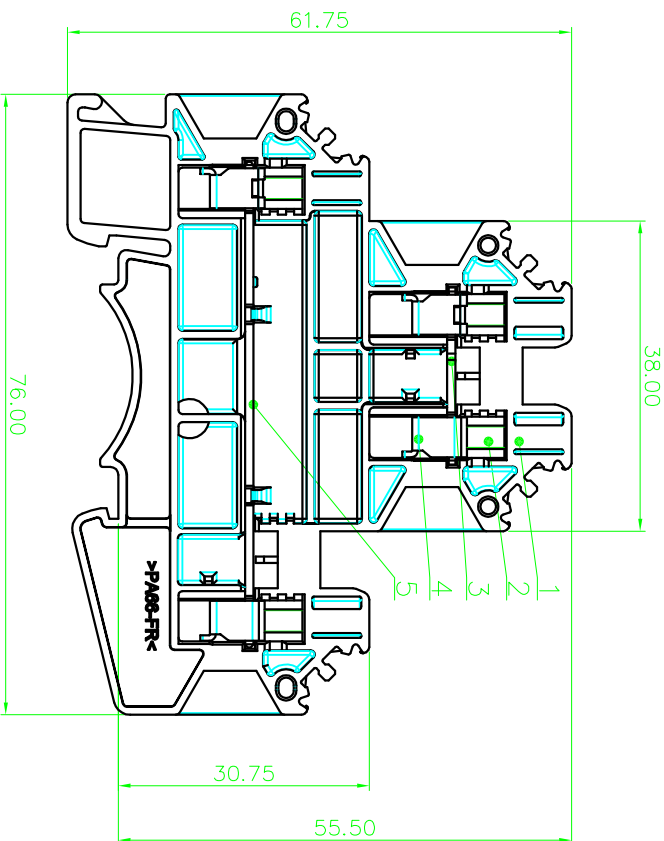

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 20A
 - 2.Withstanding voltage : AC1600V/1Min.
 - 3.Torque value : M2.5 ,3.54l.b.in
 - 4.Wire range : 26~12AWG
- IEC Standard

Pollution degree	3
Overvoltage category	III
Rated impulse voltage(KV)	6.0KV
Rated voltage(V)	500V
Rated current(A)	24A

- 1.
- 2.Torque value : M2.5 , 0.4N·m
- 3.Wire range : 0.5~2.5mm²,4mm²(SOL)

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.1mm, Poles : 01P
- 3.Stripping length : 8~10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	in mm	in	tolerance
Over	6	Over	30	Over	60	Over
TO	10	TO	100	TO	100	TO
TO	10	TO	30	TO	60	TO
TO	24	TO	100	TO	150	TO
F0.15	F0.20	F0.30	F0.30	F0.50	F0.70	F1.00
						±1.30
						±2°

- 6.RoHS Compliance

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier 2	Copper	Sn Plated
4	Gage	Steel	M2.5/Zn plated
3	Current carrier 1	Copper	Sn Plated
2	Screw	Steel	M2.5/Zn plated
1	Housing	PA66	UL94V-0

PART NO.:	/	NAME:	宁波德松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPD:			
CHKD:			
DRAFT:	Huanggs 2018.11.09	TITLE:	CUSTOMER DRAWING
		DRAWING NO.:	DCKKB2.5-C04
		REV	DO-1
		SHEET	1/1
		SCALE	1:1

DETACHED LISTS			
THIRD ANGLE PROJECTION			

