



未注公差/General tolerances(mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

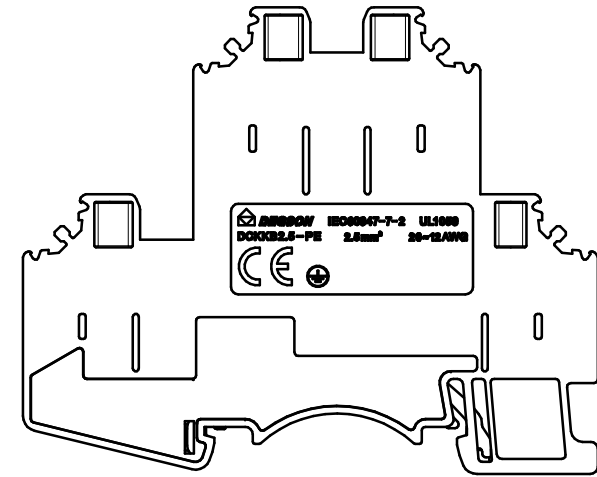

ITEM	NAME OF PART	MATERIAL	NOTES
7	Current_carrier	Copper	Sn Plated
6	Top_bottom_Bridge_piece	Copper	Sn Plated
5	Grounding	Copper alloy	Sn Plated
4	Screw	Steel	M2.5/Zn plated
3	Long_current_carrier	Copper	Sn Plated
2	Cage	Steel	M2.5/Zn plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5: 0.4/3.6		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~12 / 0.5~2.5&4 SOL		
间距/Pitch(mm)/线数范围/Poles	5.1/N=01P		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

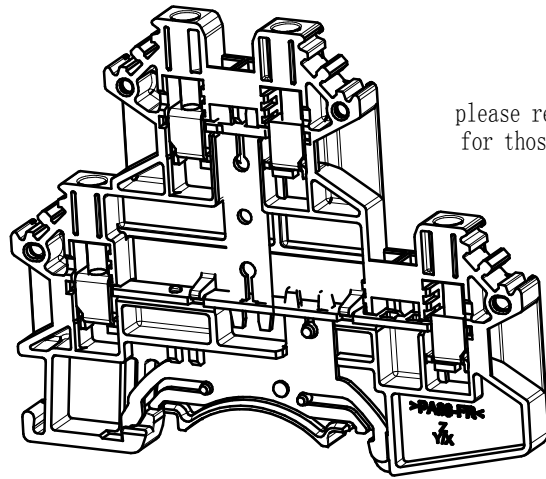

please refer to the 3D model, for those unmarked dimensions

APPD: 李根旁	2021.08.23
CHKD: 马恩开	2021.08.23
DRFT: 马恩开	2021.08.23

MATERIAL:	SURFACE:		
MAT NO./REV: 11020000069-1 / 01	MAT STATUS: 批量		
NAME: DCKKB2.5-PE-01P-1C-00A(H)			

00	ECN	由D0-1转成SE格式的00版本	马恩开	2021.08.23
REV	ECN	DESCRIPTION	DRFT	DATE

DRAWING NO. 200002805	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 1:1	SHEET 1/1
-----------------------	-----------------------	--------------------	-----------	-----------

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. All rights reserved for patent, utility model or design registrations. 非经明确授权, 否则禁止转让、复制、利用、交流本文件的内容。 未经授权, 不得复制或传播本文件的所有权利。