

QRHA187

3.94~5.99GHz, WR-187

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency:	3.94~5.99GHz
Gain:	10, 15, 20dB
VSWR:	1.25 max. 1.5 max. (Connectorized)
Impedance:	50Ω

Mechanical

Interface:	WR-187
Flange:	FDP48
Connectors:	N Female
Material:	Aluminium

How To Order

QRHA187-X-Y

X: Gain in dB

Y: Connector type

Connector naming rules:


N - N Female

Examples:

To order an antenna, 3.94-5.99GHz, 10dB, WR-187, specify QRHA187-10.

Customization is available upon request.

Outline Drawings

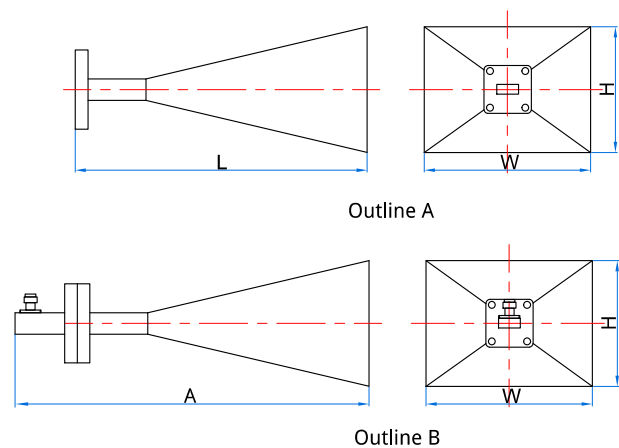

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Gain	L	W	H	A
10dB	65.5 [2.58]	73.6 [2.90]	56.1 [2.21]	116 [4.57]
15dB	101.5 [4]	150.7 [5.93]	114 [4.49]	152 [5.98]
20dB	353 [13.90]	279.9 [11.02]	220.4 [8.68]	403.5 [15.89]